

TR10

english



TECHNOALPIN®




TECHNO



INNOVATION MAKES THE DIFFERENCE


The focus of the development work at TechnoAlpin is on guaranteeing top snow quality while at the same time optimizing the use of resources and maximizing the usability of the snow producers. The TR10 fan gun combines all of these criteria to reach the peak of achievement and innovation excellence.

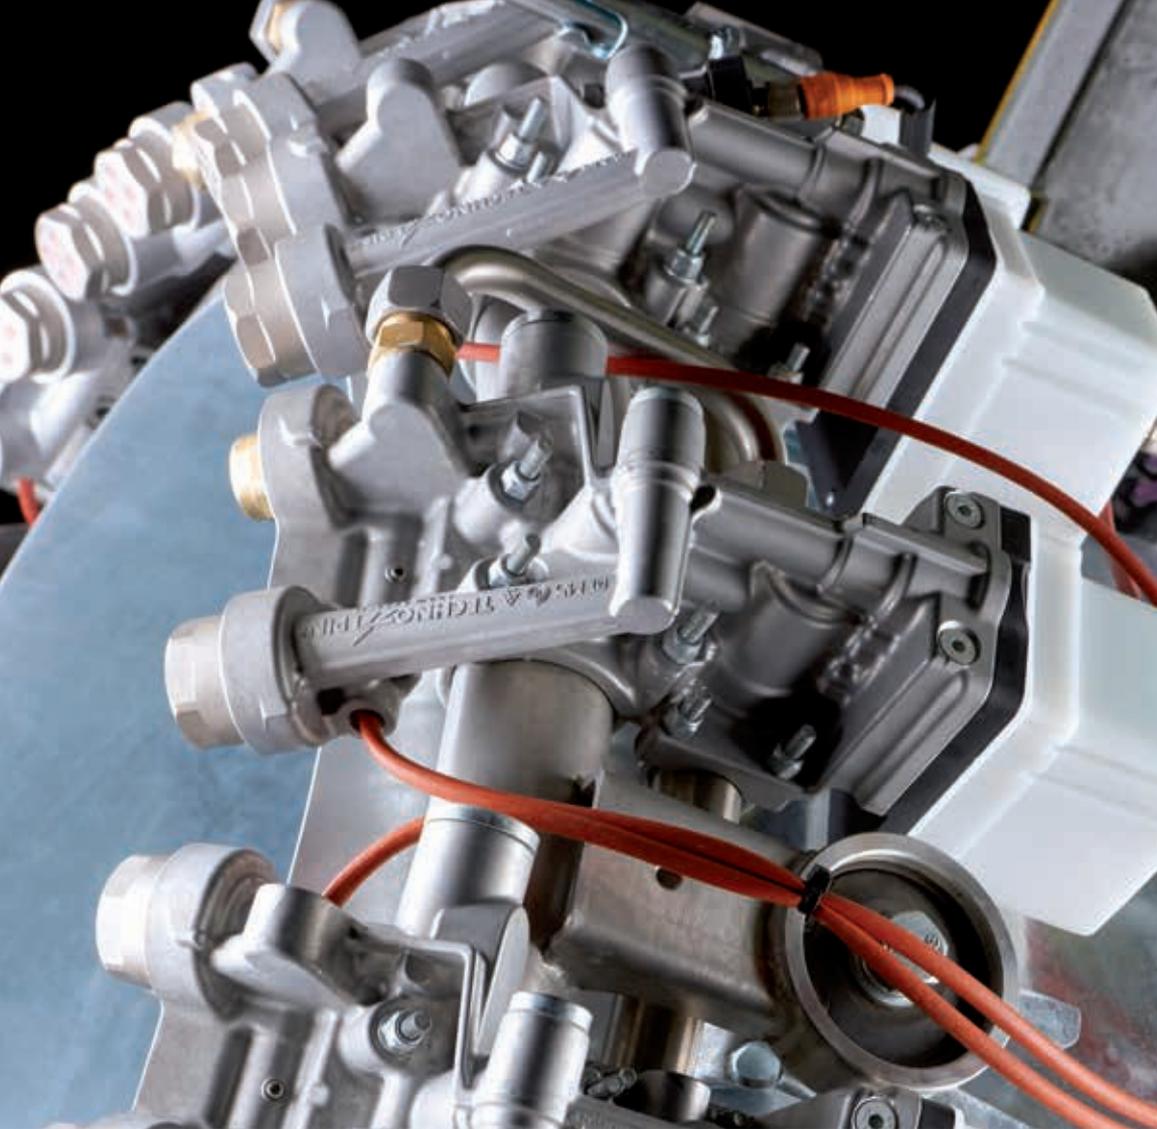

TR10

MORE IS MORE

A completely new nozzle valve system has been designed for the TR10. The central valve block is replaced by single valves individually controlled. Highly innovative and perfectly coordinated, each nozzle block on the nozzle ring is controlled by its own valve. More valves bring more advantages.

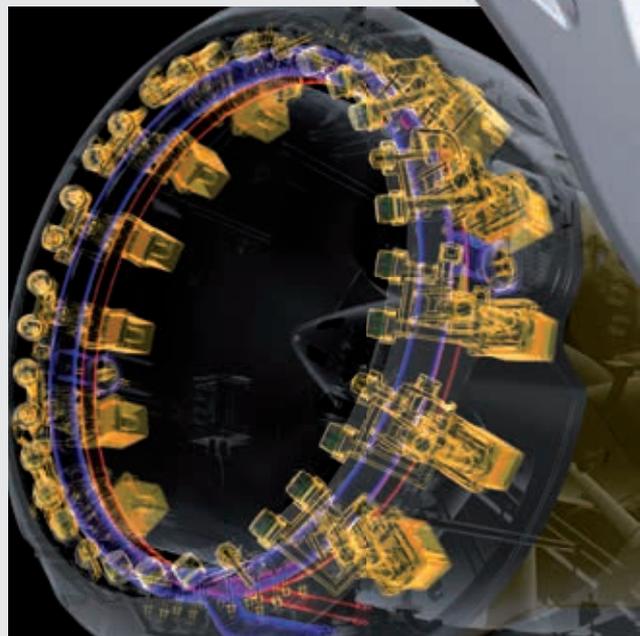

TECHNOALPIN®



RESOURCE EFFICIENCY The new nozzle valve block on the TR10 prevents water loss when operating the various valves as the nozzles are now emptied using compressed air. The excess water is integrated directly into the air stream and then converted into snow.


OPERATIONAL SAFETY The innovative nozzle valve design completely eliminates the need for the central valve block and front discharge. This prevents the formation of ice in front of the machine and greatly increases operational safety.

TECHNICAL RELIABILITY Thanks to the intelligent valve circuit, the valves can replace each other in the event of a failure, ensuring that the required number of nozzles is always open.


TR10

BEST SNOW OUTPUT IN MARGINAL CONDITIONS

Air cooling on the machine is key to improving snowmaking performance in marginal conditions. The air cooler on the TR10 has been redesigned and improved. It has an unprecedented cooling capacity due to the significant increase in the amount of cooling surface, thereby enabling the production of snow of perfect quality even in difficult temperature conditions. The TR10 is particularly impressive at borderline temperatures, achieving unsurpassed levels of snow output.

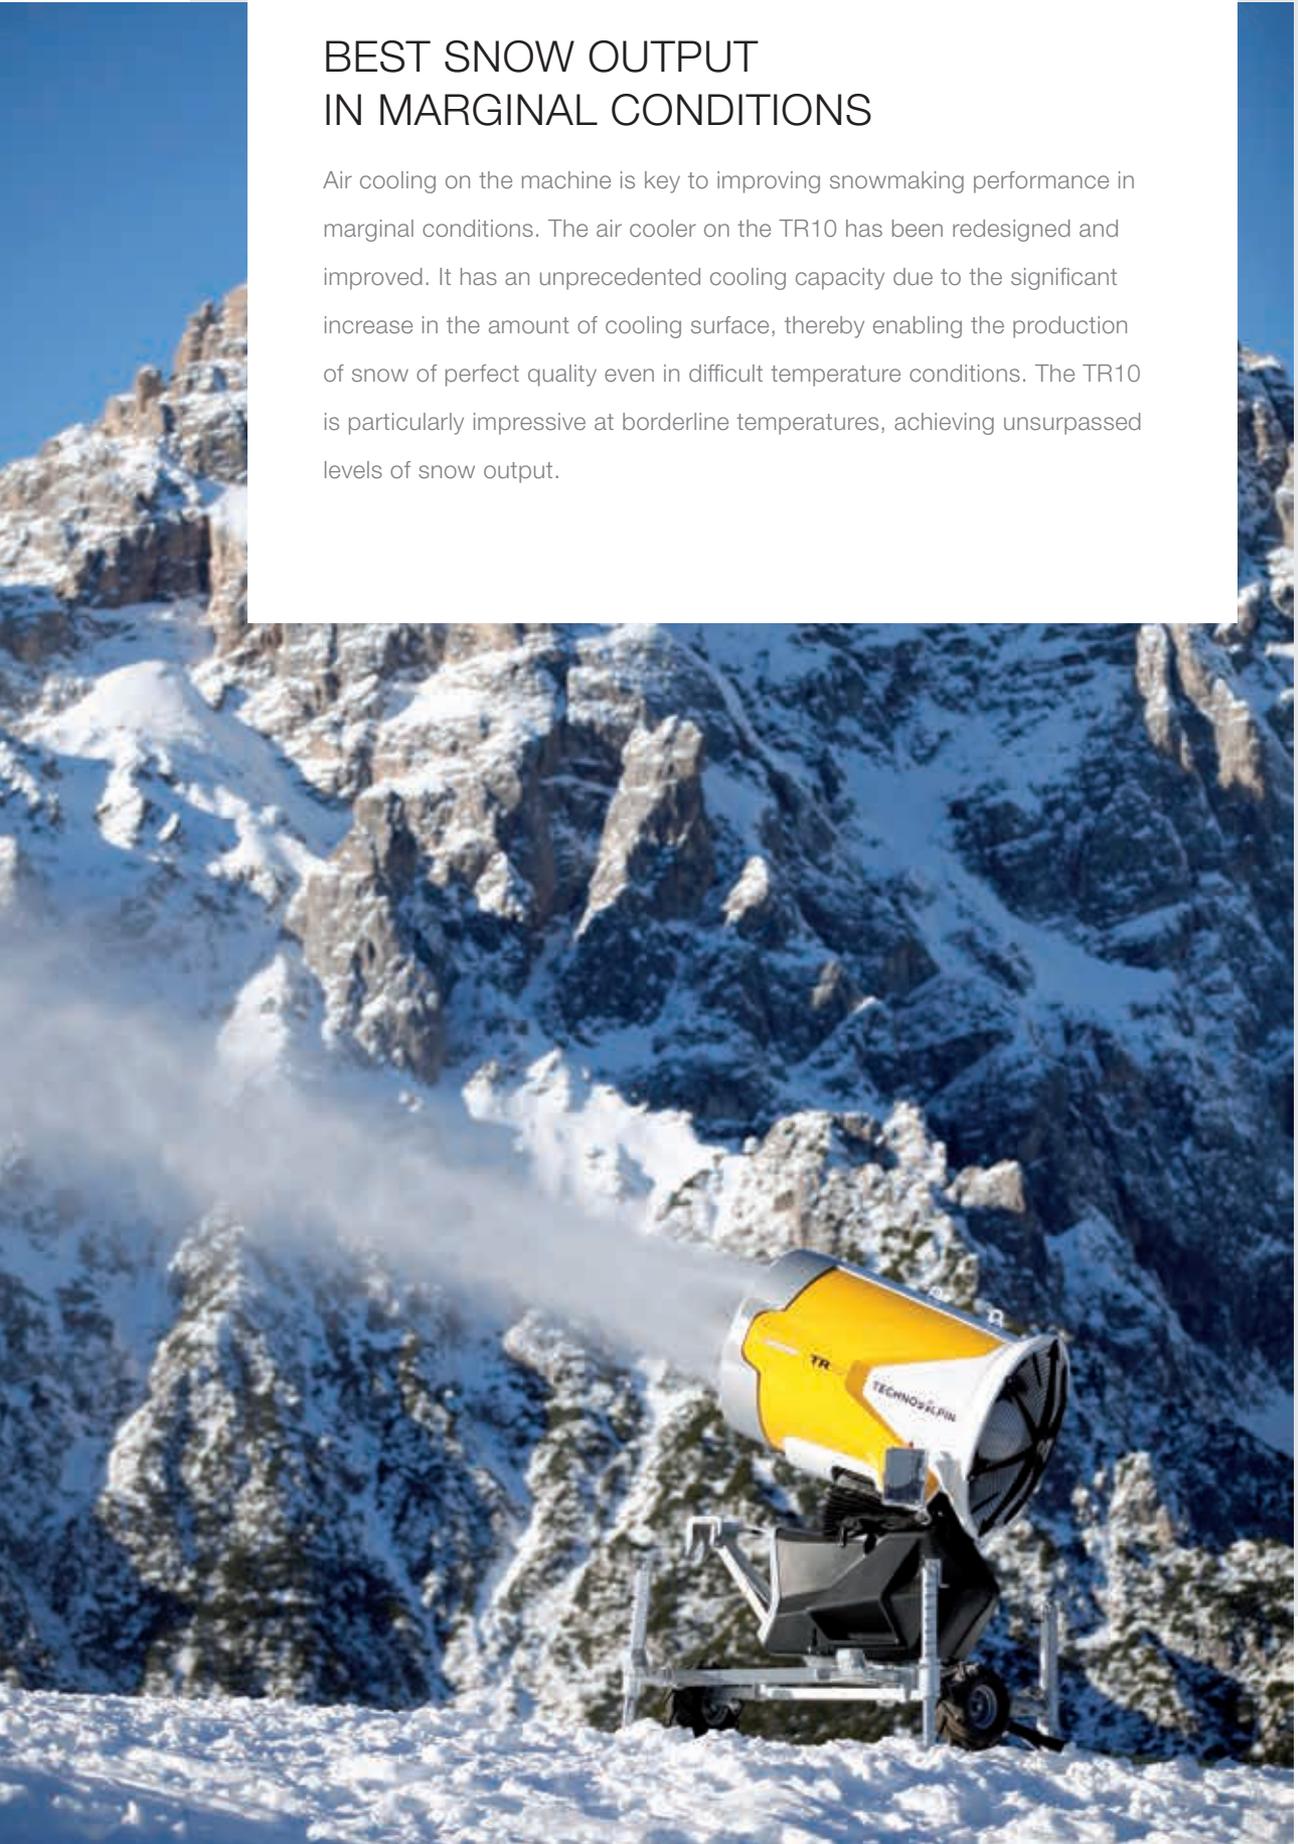

TECHNOALPIN®

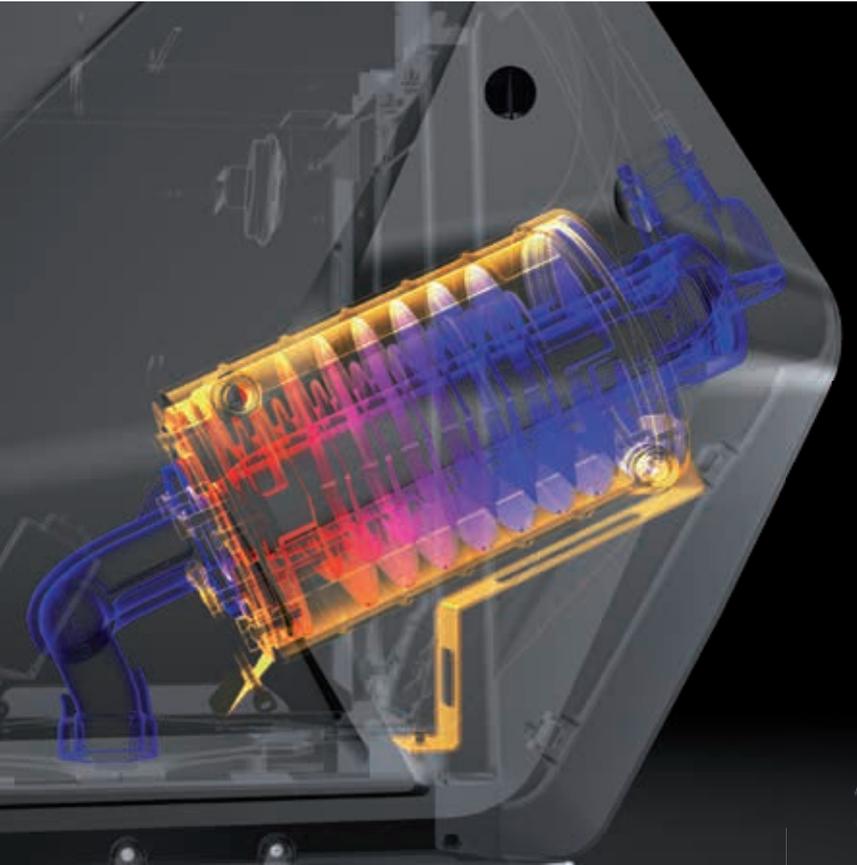



TR10



GEMSTONE-QUALITY SNOW

Perfect snow quality starts with the smallest parts of a snow producer. The optimum air and water mixture is the decisive factor. All the nucleators on the TR10 are fitted with two ruby inserts as standard, seated in the hole through which the correct amount of water is allowed into the compressed air. These ruby inserts boast maximum wear resistance, even in the presence of aggressive water and high operating pressures. They enable the constant production of high-quality snow over many years and significantly reduce the need to replace nucleators.

ALWAYS IN THE LEAD


The correct snowmaking position is vital in order to produce snow efficiently. The TR10 has a completely new mechanism which automatically takes the snow producer – even the mobile model – to the correct vertical snowmaking position when it is put into operation. The TR10 will automatically move to the correct working position and return to the starting position after the end of snowmaking operations, making it less susceptible to damage when not in use.

SIMPLE AND AUTOMATIC

The aim of this change was not only to improve the snow output but also to simplify the work of the snowmaking crew. Both the starting and the working position of the TR10 can be preset individually. The swivel settings of the fan gun have also been improved in order to optimize the deposition of the snow on the slope.





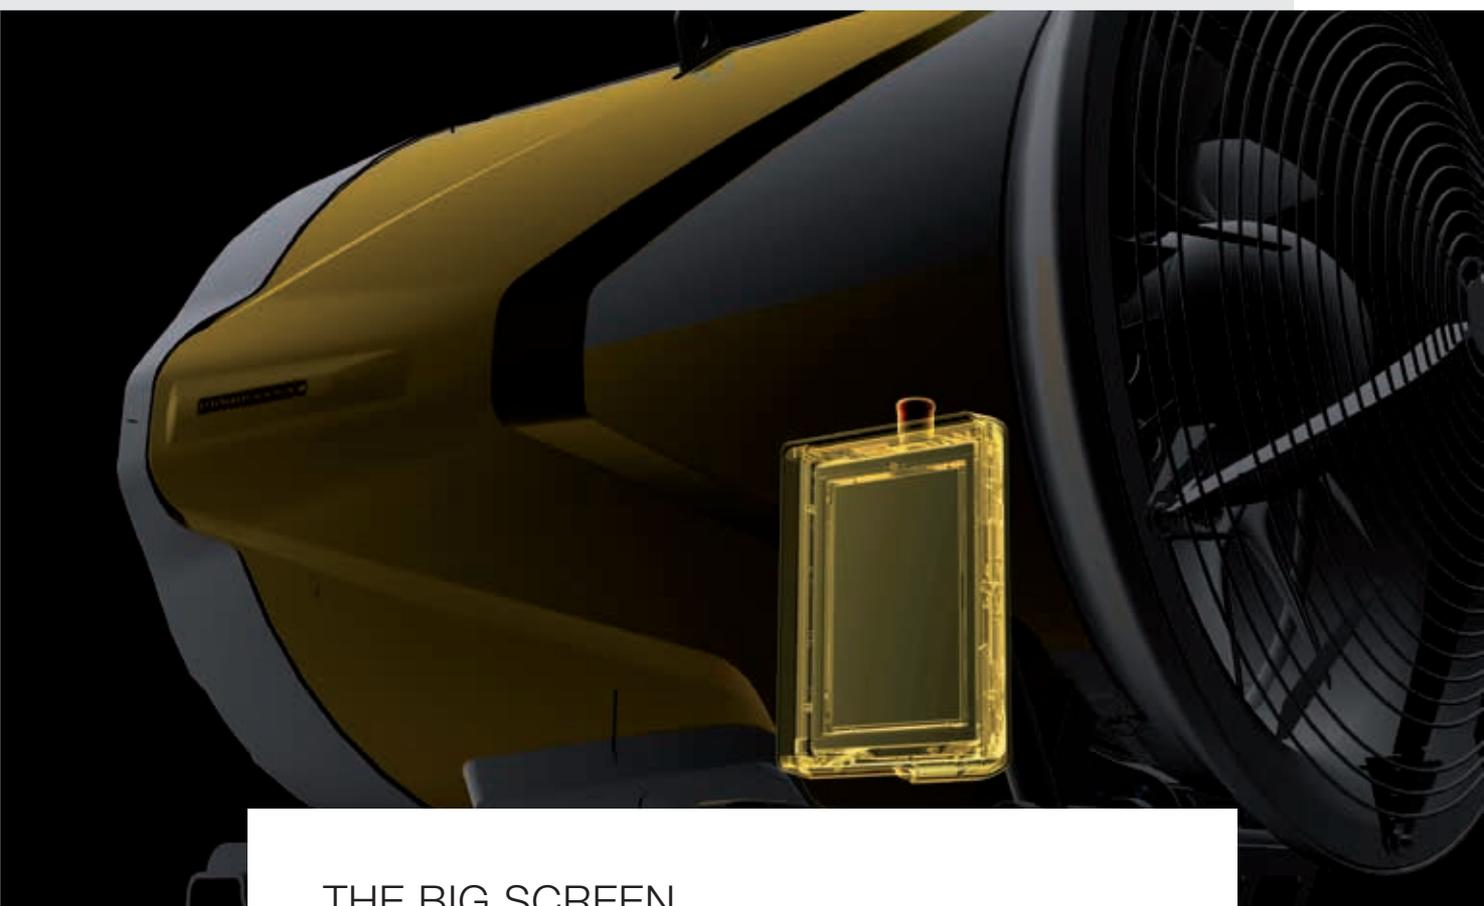

THE BIG SCREEN

The TR10 comes with the largest touch display on the market. The touch functions have been specifically integrated into the machine control system and are therefore particularly user-friendly. The touch display has been carefully adapted to the requirements of the snowmaking crews and boasts impressive and unique features.

OPTIMUM READABILITY The incredible brightness level and automatic dimmer function allow perfect legibility, even in strong sunlight and at night. The screen is also still easy to read at very steep angles.

FUNCTIONAL EVEN IN EXTREME SITUATIONS The display is still fully operational at -30°C . The larger spaces between the individual touch elements allow precise control even when wearing gloves.



PERFECTION AND DESIGN

The innovative and functional design of the TR10 is a masterpiece of engineering. The side covers open out, enabling instant access to all the main components. The front ring on the TR10 has a telescopic pull-out action, allowing rapid access to the nozzle valve ring without having to remove the cover. Ease of maintenance is increased and transport safety is improved by the integration of all the protruding parts in the turbine housing.

SYMPHONY OF EXCELLENCE



Consummate precision and technical innovation down to the very last detail. This is the new TR10 fan gun. This is TechnoAlpin.



**LISTEN TO THE DIFFERENCE
INNOVATION MAKES.**

TR10

TECHNICAL DATA

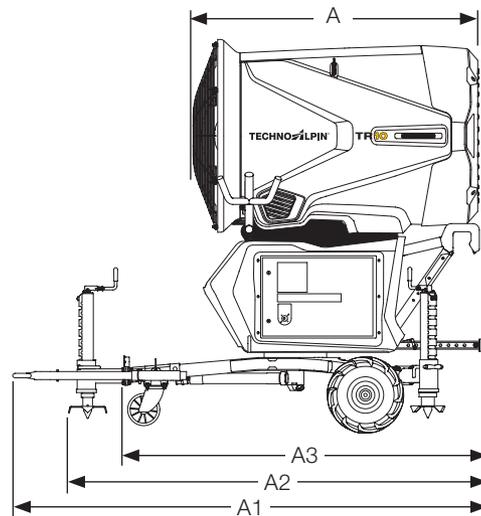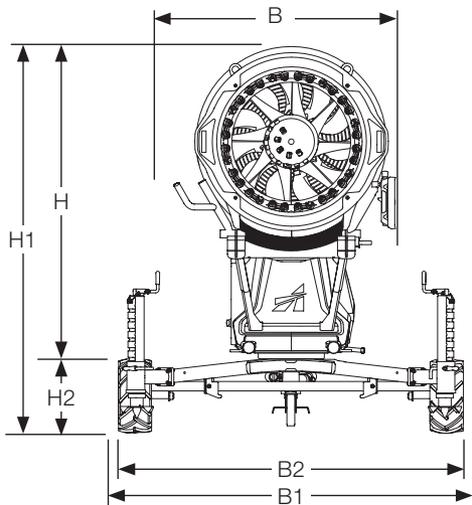

Electrical characteristics

Nominal voltage	400 V
Nominal frequency	50 Hz
Nominal current	41 A*
Connection plug	5x63 A
Nominal power POWER UNIT (turbine + compressor)	22 kW
Heating	1.3 kW

Dimensional data

Snow gun length A	1,750 mm
Snow gun width B	1,400 mm
Snow gun height H	2,000 mm
Undercarriage height H2	385 mm
Total height H1	2,470 mm
Length [max.] A1	3,100 mm
Length [without steering] A2	2,460 mm
Length [without front jacks] A3	2,100 mm
Width [max.] B1	2,350 mm
Wheelbase [wheels] B2	2,160 mm

Weights

Snow gun - compressor	708 kg
Transport frame with jacks	120 kg
Double lifting bracket	38 kg
Kit for mobile carriage tow (CTGR0007)	62 kg

Miscellaneous

Operating temperature	-25 ÷ +2 °C
Rotational speed	1,500 rpm
Turbine inclination	45 deg.
Horizontal rotation	360 deg.
Swing (automatic)	180 deg.

Water

Operating pressure	8 ÷ 40 bar
Water filter	250 micron
Water connection - Camlock	2"

Nozzle configuration

Nucleators	8
Fixed Quadrijet nozzles	8
Controllable Quadrijet nozzles	16

Data are subject to change depending on the type of plant and/or the country of installation (please always refer to the wiring diagrams).

* Measurements at nominal voltage at 1,500 m above sea level and at a temperature of 0 °C.



WWW.TECHNOALPIN.COM